


SPECIFICATION

客戶/CUSTOMER	規格型號/TYPE	EPC-46.5 Horizontal 2 sections 9+9PIN	制定日期/DATA	2022/4/2
客戶料號/C.P.O	生产料號/ZC NO.	DG-T-EPC46.5-01	版本/VERSION	REV.A

1. 外觀尺寸 / PHYSICAL DIMENSION (UNIT: m/m) :

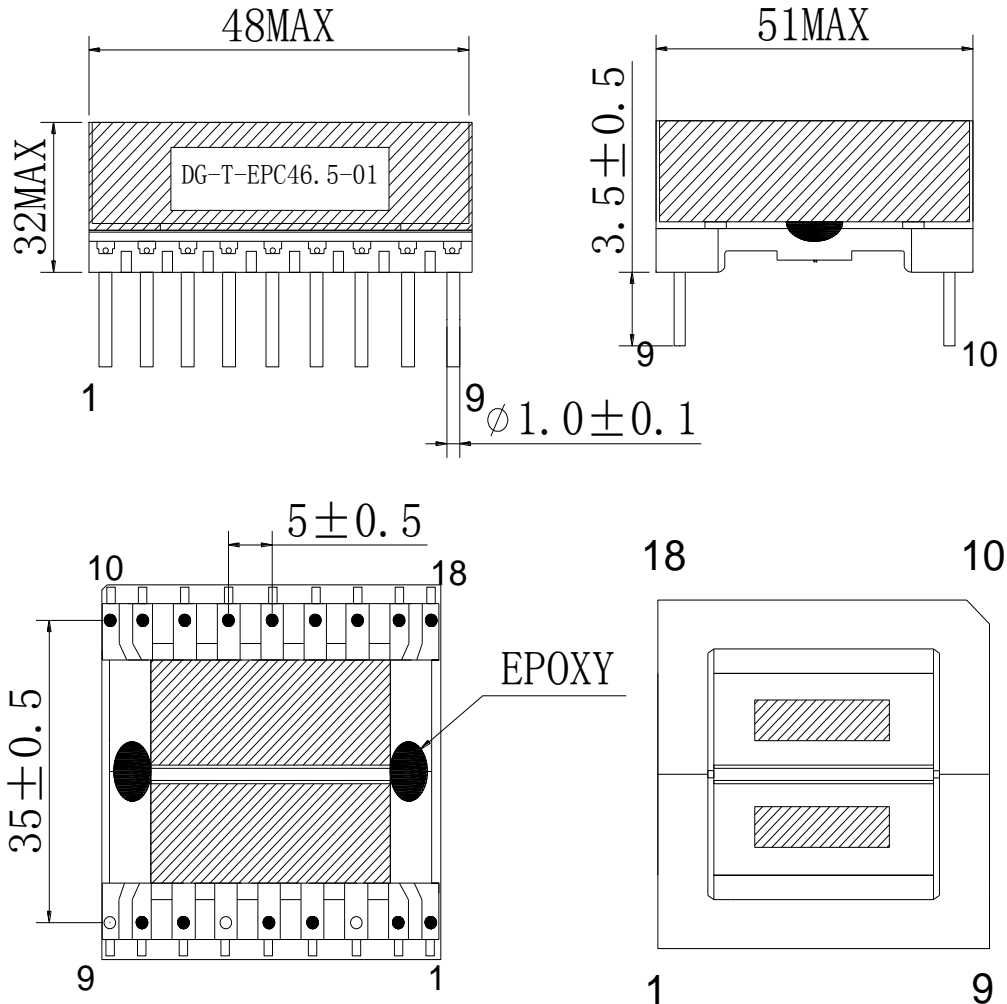

Remark:


- * Bobbin PIN3,6,9 CUT OFF(Note: Narrow side slot for PIN1-9)
- * 线包完成焊锡后，产品需加套盖子后再组装磁芯
After the wires soldered, the product needs to be covered with a case before assembling the magnetic core
- * CORE需研磨,研磨磁芯装在PIN10-18侧，用19mm胶带固定3TS
CORE needs to be grinded, the grinding core is installed on the PIN10-18 side, using 3TS 19mm tapes grapped
- * 产品需真空含浸烘烤干，磁芯结合处与骨架外壳点黑胶固定（两点如图）
The product needs to be vacuum impregnated and baked, using balck glue fixed the core and bobbin
- * 标签：（透明底黑字或印制）如图
Label: （ Black text on transparent background or printed ）

	確認/APPROVAL	審核/CHECKED	制定/PREPARED
	Haitao Huang	Yong Yuan	Anbing Deng


SPECIFICATION

客戶/CUSTOMER		規格型號/TYPE	EPC-46.5 Horizontal 2 sections 9+9PIN	制定日期/DATA	2022/4/2
客戶料號/C.P.O		生產料號/ZC NO.	DG-T-EPC46.5-01	版本/VERSION	REV.A

2. 原理圖/SCHEMATIC :

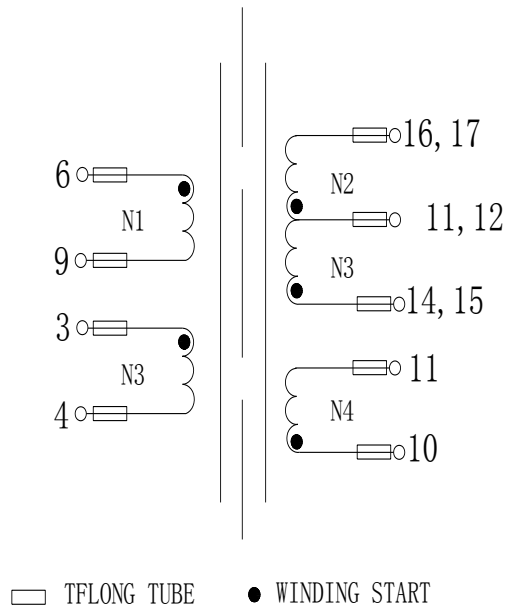

3. 繞組示意/WINDING SCHEMATIC :

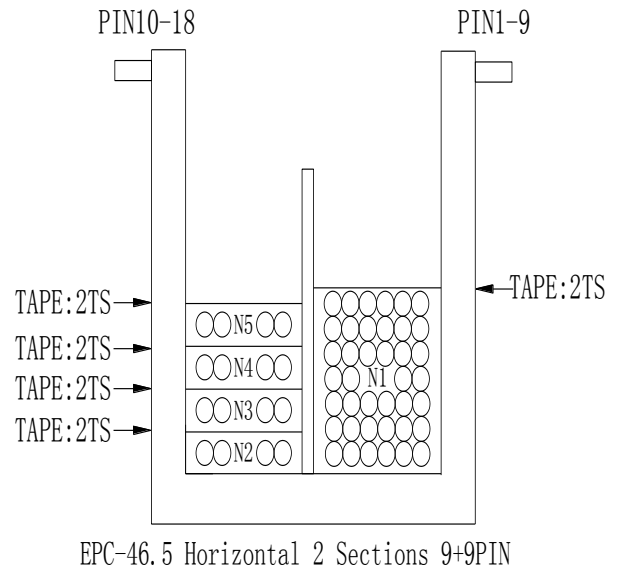

备注:

- * 所有绕组PIN10-18脚朝外,顺时针绕制All windings PIN10-18 feet are outward, wound clockwise
- * N6绕组靠PIN10-18边线槽绕线,绕线时需跨槽挂脚
The N6 winding is wound by the PIN10-18 side slot, and the legs need to be hung across the slot when winding.
- * 《特别注意：窄边线槽为PIN1-9》
Note: narrow edge slot is PIN1-9



確認/APPROVAL

Haitao Huang

審核/CHECKED

Yong Yuan

制定/PREPARED

Anbing Deng